


Subsoiler WU (working depth 700 mm)

- Subsoiler for tough circumstances
- Heavy duty robust frame
- Tines are provided with shearing bolt protection
- Tine thickness 30 mm
- Replacable shares (width 200 mm) for bent and straight tines
- Replacable shares (width 130 mm) for Flevotine
- Outer tines of the WU22-V and WU23-V are adjustable in width
- Cat. 2 linkage as a standard

Available tines for WU subsoilers

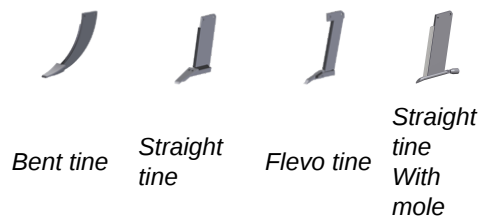

Type	Max. working depth	Number of teeth	Tooth distance	Weight	Price with bend teeth	Price with straight teeth	Price with Flevo teeth
WU11	700 mm	1	0 mm	210 kg	€ 1825,-	€ 1900,-	€ 1825,-
WU22-150	700 mm	2	1500 mm	375 kg	€ 2950,-	€ 3100,-	€ 2950,-
WU22-180	700 mm	2	800 mm	390 kg	€ 3000,-	€ 3150,-	€ 3000,-
WU22-V	700 mm	2	1500-2250 mm	545 kg	€ 3950,-	€ 4100,-	€ 3950,-
WU23-150	700 mm	3	750 mm	435 kg	€ 3325,-	€ 3550,-	€ 3325,-
WU23-180	700 mm	3	900 mm	445 kg	€ 3400,-	€ 3625,-	€ 3400,-

